

Caratteristiche / specifications

Tipo di installazione	Indoor, incasso
Type of installation	Indoor, recessed

Peso
Weight

Materiale	Alluminio
Material	Aluminium

trattamento / colore (Y)	Bianco (W)	Nero (B)	Oro (R)
--------------------------	------------	----------	---------

treatment / colour (Y)	White (W)	Black (B)	Gold (R)
------------------------	-----------	-----------	----------

Grado protezione IP	IP20 DIM
IP protection grade	IP20 DIM

Dimensioni d'ingombro	Ø125 84
Overall dimensions	Ø125 84

Marcature
Labelling



Descrizione prodotto / Product description

Proiettore orientabile ad incasso da alimentare a 150 , 350 o 500 mA. Realizzato interamente in alluminio. EYE monta un COB led, con CRI>85 a 3000°K; è disponibile anche con colorazioni luce diverse. Gruppo ottico in policarbonato trasparente ad alta efficienza con schermo anti abbagliamento frontale in PC satinato. Sono disponibili le casse forme per installazione arretrata nel controsoffitto.

Adjustable recessed led light, 150mA , 350mA or 500mA. Made entirely of aluminum. EYE has a COB LED, with CRI > 85 at 3000° K; available in different light colors. High efficiency polycarbonate optics with anti-glare screen in satin PC. Available forms for recessed installation in false ceiling.

Ottiche-diffusori / optics-diffusers

Emissione luce (X)	Diretta	14° (N) - 30°(M) - 40°(L) - 70° (W)
Light output (X)	Direct	14° (N) - 30°(M) - 40°(L) - 70° (W)

Caratteristiche elettriche Electrical specifications

Gestione luce	ON/OFF Dimmerabile
Light control	ON/OFF Dimmable

Schermo / Cover

Materiale	PC satinato
Material	Satin PC

Sorgente / Source

13W	350 mA	1420 lm	CRI>85	2700/4000°K
-----	--------	---------	--------	-------------


Durata LED / LED Life


50000 h

Alimentatore / Power supply

Non incluso
Non included

INCASSO ARRETRATO / BACKWARD RECESSED

 Ø142 mm 15 mm

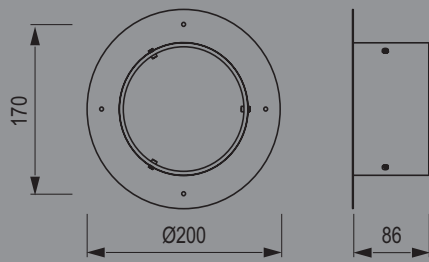

(Y) trattamento / colore

Bianco (W)
Nero (B)
Oro (R)


(Y) treatment / colour

White (W)
Black (B)
Gold (R)

ACCESSORIO - ACCESSORY
G3802IA30000 - (Y)

INCASSO ARRETRATO / BACKWARD RECESSED

 Ø142 mm 30 mm

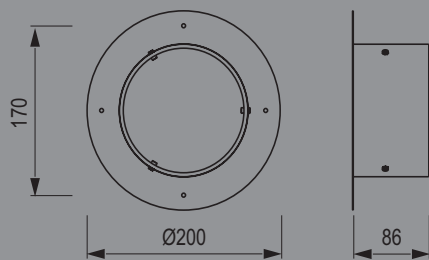

(Y) trattamento / colore

Bianco (W)
Nero (B)
Oro (R)

(Y) treatment / colour

White (W)
Black (B)
Gold (R)