

Caratteristiche *Characteristics*

Tipo di installazione <i>Type of installation</i>	Interno <i>Indoor</i>
Materiale <i>Material</i>	Alluminio <i>Aluminum</i>
Finitura <i>Finish</i>	(Vedi tabella finiture)* <i>(See table of finishes)</i>
Dimensioni <i>Dimensions</i>	78x78mm 2690 ≤ X ≤ 2720
Foro d'incasso <i>Recessed hole</i>	-
Peso <i>Weight</i>	-
Grado di protezione <i>Degree of protection</i>	IP40
Certificazioni <i>Certifications</i>	CE RoHS

Caratteristiche elettriche *Electrical characteristics*

Tensione di alimentazione <i>Supply voltage</i>	24V
Frequenza di alimentazione <i>Power frequency</i>	-
Potenza totale <i>Total power</i>	53W
Classe di isolamento <i>Insulation class</i>	III

Sorgente luminosa *Light source*

Temperatura colore <i>Color temperature</i>	2700°K	3000°K	4000°K
Flusso nominale <i>Nominal flow</i>	7503 lm	7656 lm	7809 lm
Flusso reale <i>Real flow</i>	5252 lm	5359 lm	5466 lm
Efficienza luminosa <i>Luminous efficiency</i>	99lm/W	101lm/W	103lm/W
CRI	>90 R9>50		
UGR	<19		
MacAdam	2		
Emissione luce <i>Light emission</i>	diretta <i>direct</i>		
Materiale <i>Material</i>	PMMA		
Ottica <i>Optics</i>	120°		
Lifetime (Khr)	>50000 h L90 B10		

Gestione luce *Light management*

Alimentatore <i>Driver</i>	Remoto
	ON/OFF DALI

Accessori *Accessories*

ON/OFF	CEC00576
DALI	CEC00519
BOX ON/OFF	G2001SC10010
BOX DALI/ PUSH	G2002SC10010

Tabella finiture *Table of Finishes*

- A** Oro opaco
Matt gold
- B** Oro spazz.
Brushgold
- C** Argento opaco
Matt silver
- D** Argento spazz.
Brush silver
- F** Bianco opaco
Matt white
- G** Bianco raggrin.
Embos. white
- I** Rame opaco
Matt copper
- J** Rame spazz.
Brush. copper
- K** Bronzo opaco
Matt bronze
- L** Bronzo spazz.
Brush. bronze
- M** Ruggine
Rust
- O** Nero raggr.
Embos. black
- P** Nero opaco
Matt black

Curve fotometriche/ *Photometric curves*

Curva polare
Polar curve

Ottica 120°
Optics



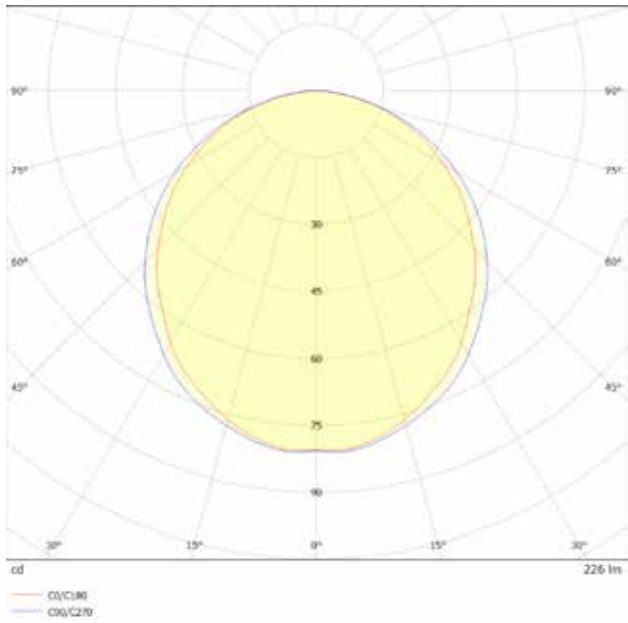


Diagramma a cono
Cone diagram

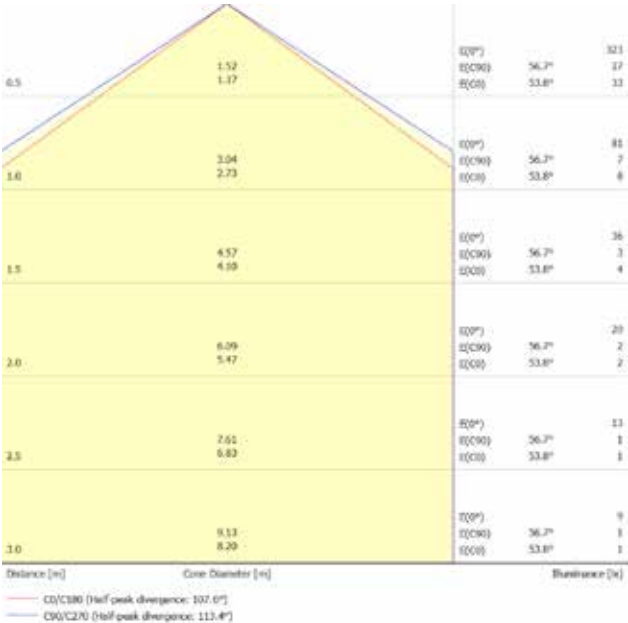


Driver ON/OFF CEC00576

Driver 75W 24V IP67 ON/OFF
180X63X36mm

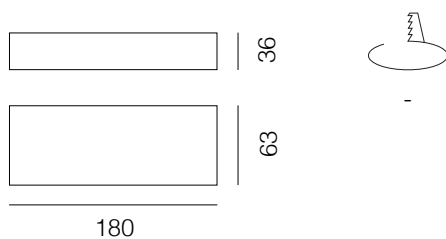

Driver DALI CEC00519

Driver 75W 24V IP67 DALI
180X63X36mm

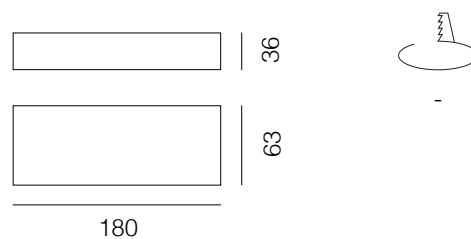

Box ON/OFF G2001SC1001*

SECRET box driver ON/OFF

*aggiungere lettera finitura

Box DALI G2002SC1001*

SECRET box driver DALI

*aggiungere lettera finitura